

# PL-52C18A


## H.264 6 Inch 2.0MP IP Speed Dome



### Features

- 2.0MP H.264 real time coding
- Max. resolution: 1920 \* 1080
- 3D DNR, digital WDR
- IR cut filter, true day / night
- IR distance: up to 120m
- 1-CH alarm input, 1-CH alarm output, and alarm linkage
- 1-CH audio input, 1-CH audio output
- 18X optical zoom
- Support dual streams
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection

### Dimensions

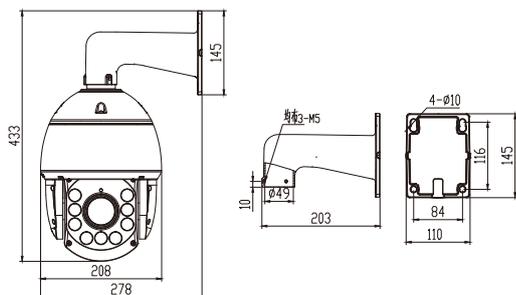

### Specifications

Model	PL-52C18A
<b>Camera</b>	
Image Size	1920*1080
Image Sensor	1/2.9" Low illumination CMOS
Min. illumination	Color: 0.01Lux @(F1.2, AGC ON); 0 Lux with IR B/W: 0.001 Lux @(F1.2, AGC ON), 0 Lux with IR
White Balance	Auto / Manual
Shutter Time	Automatic
Lens	18X Zoom, f=4.7-84.6mm, F1.6-F2.7
Day & Night	IR cut filter with auto switch
Digital Zoom	18X
Privacy Mask	4
Focus Mode	Preset Point / Preset Point Cruise / Horizontal Scan / Auto Scan / Path
Digital NR	3D DNR
<b>PTZ</b>	
Movement Range(Lens)	Horizontal: 0°~360° endless rotation
Pan Speed	Preset Speed: 240°/s, Manual Control Speed: 0.1°~160°/s
Movement Range(Tilt)	Vertical: -2°~90° (auto rotation)
Tilt Speed	Preset Speed: 200°/s, Manual Control Speed: 0.1°~120°/s
Presets	255
IR Distance	Up to 120m
<b>Network</b>	
Max. Resolution	1920 * 1080
Main Stream	2MP (1920 * 1080)@25fps
Video Compression	H.264
Audio Compression	G.711a
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (802.1x, IPv6 optional)
Simultaneous Live View	5 Local users, 20 Remote users
Security Measures	Up to 32 users 3 levels: Administrator, User and Operator
<b>System Integration</b>	
Alarm I/O	1/1
Alarm Linkage	Yes
Audio I/O	1/1
Network Interface	1*RJ45 10/100Mbps Ethernet Port
Memory Card	On-board storage, Up to 32G
Web Browser	Multi Browser Access (IE, Chrome, Firefox, Safari)
<b>General</b>	
Temperature	-20 C ~65 C
Humidity	10%-90% RH
Power Supply	DC12V
Consumption	MAX 5W
Protection Level	IP66
Weight	4.2kg
Dimensions	208mm*443mm
<b>Available Model</b>	
Available Model	PL-52C18A

