

BL-34F28L/ BL-34F38L

4MP HD 4 in 1 Camera



True WDR



AWB



6KV
Protection



Day&Night




IP67

Features

- IR distance: 20-30m
- 3D DNR, True WDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

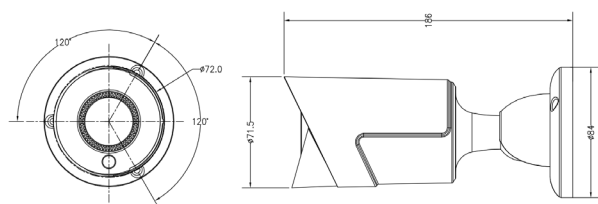

Specifications

Model	BL-34F28L	BL-34F38L
Camera		
Image Sensor	1/3" 4MP CMOS	
Efectivite Pixels	2560*1440	
Shutter Time	1/25s~1/50,000s (PAL); 1/30s~1/60,000s (NTSC)	
Image System	PAL/NTSC	
Video Frame System	4MP@25fps (PAL); 4MP@30fps (NTSC)	
IR Distance	20-30m	30-50m
Video Output	AHD/TVI/CVI/CVBS	
Lens	2.8-12mm Motorized	
Lens Mount	Φ14	
Horizontal FOV	25°-91°	
S/N Ratio	≥50dB	
Functions		
OSD	UTC support based on DVR	
AGC	Support	
White Balance	Auto/Manual	
Day & Night	Auto/Manual	
Video Setting	Contrast/Sharpness/Color Gain/ Format/True WDR/DNR	
Language	Multi-Language	
General		
Casing	Aluminium alloy	
Ingress Protection	IP67	
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH	
Power Supply	DC12V±10% 1.5A	
Power Consumption	3.5W MAX (IR cut off)	
Dimension	186.5(L)*71.7(W)*84(H)mm	
Net Weight	350g	

